



LOWBOY, 55 TON
(Extendable)
55LBE150824



LOWBOY, 55 TON, (Extendable)

4 AXLE, DETACHABLE NON GROUND BEARING,
MAXIMUM PAYLOAD 110,000 LBS



Oficina Comercial: Badajoz 100 Of. 1117 - ☎ +56 (2) 32026730 - 📱 +56 (9) 78465444





LOWBOY, 55 TON

Features & Benefits



Flip Axle



Globe Trailers has a patent on the hydraulic flip axle design. It allows for less down time when operating the flip axle and it can be easily detached when required.

12" Cross Member Spacing




Standard 12" stubbed cross member spacing produces added strength to the trailer and also less stress on the decking, leading to a longer life of the decking material.

High Quality Steel



Constructed with 100,000 psi yield strength steel for the side rails and main beams. The high tensile steel ensures the designed camber is retained, and allows for a longer product service life.

Added Security



Globe Trailers air lock with safety bar and spring extended pin ensures that the gooseneck locking pin will remain secured even if air pressure is lost.

STEMCO Wheel Warranty



5 year wheel end warranty. Guardian wheel seals, Pro-Torq spindle nuts and Sentinel hub caps.

Heavy Duty Outriggers



Standard heavy duty outriggers that span the entire height of the side rail allow for maximum force to be applied when in use.

Air Bags



30,000 pound rated large diameter air bags are standard. This allows for lower operating pressure and higher capacity when needed.

Decking Options



Oak: Standard.
Apitong: Best strength to weight ratios of natural woods.
Rumber: Composite which is impervious to fluids, mud, oil and UV rays.

Warranty



Globe Trailer's 10 year structural warranty on all lowboys is the best in the industry. Most competitors offer only a 5 year warranty. This shows how committed Globe Trailers is to it's customers.

Oficina Comercial: Badajoz 100 Of. 1117 - ☎ +56 (2) 32026730 - 📱 +56 (9) 78465444



LOWBOY, 55 TON

Features & Benefits



Flip Box Setup



Flip box length options are available to achieve longer swing clearances when needed for longer truck frames or when coupling to single or multi-axle jeeps.

V-Style Guide



V-Style guide with front tapered beams helps position the gooseneck locking pin, which makes hooking up to a Globe Trailer fast and easy. The locking pin guide rim helps prevent the gooseneck locking pin from coming loose in transit.

Centrally Located Fittings



Air, electric and hydraulic (when applicable) fittings are all centrally located at the base of the gooseneck inside a bolster. This makes for quick and easy connect and disconnect. The fittings are protected from possible contact with equipment being loaded or unloaded.

Multi Position Ride Height



Multi Position Ride Height options. Makes adjustments for various 5th wheel heights easy and allows for larger ground clearance or lower deck height.

Color Options



Globe Trailers can powder coat to the color of your choice.

Lighting System



All Lighting is LED and mounted in rubber grommets to DOT standards.

Color Coded Hoses




Color coded air hoses allow for easy trouble shooting and maintenance.



All Globe Trailers are 100% powder coat finished. The entire process takes place at Globe's manufacturing facility. This eliminates the possibility of contamination occurring in transit between process phases. The process starts with sandblasting the trailer to near white, preheating the trailer steel in a dedicated, gas fired oven to optimum bonding temperature and applying an electrostatically charged zinc rich primer. The trailer then goes back in the oven to allow the primer to bond. After the primer has bonded, a top coat chosen from one of Globe Trailers' 188 color options is applied before once more going back in the oven to cure. The result is a durable, easily cleaned finish that protects the trailer from corrosion and ensures a long service life.



GLBE TRAILERS **Powdercoated** **LOWBOY, 55 TON (Extendable) 55LBE150824**

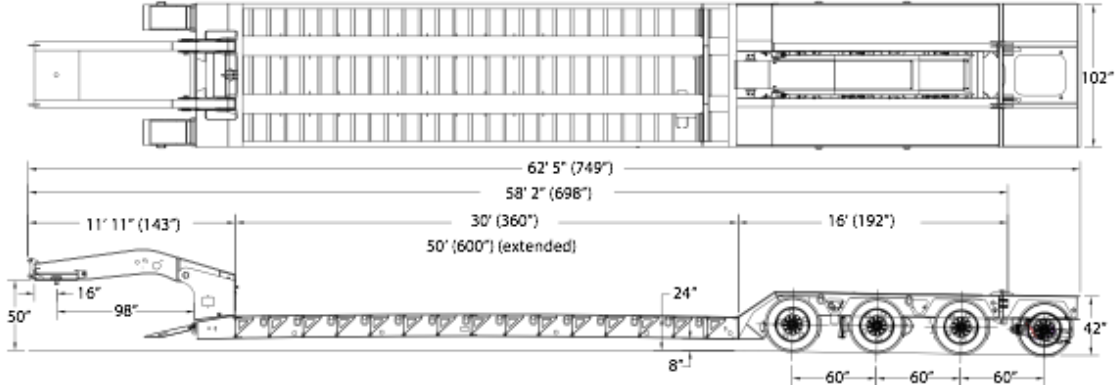

Overall Length	Overall Width	Gooseneck Length	Lower Deck Length	Lower Deck Height	Rear Deck Length	Rear Deck Height	Ground Clearance
58' 2" (698")	8' 6" (102")	11' 11" (143")	30' (360")	24"	16' (192")	42"	8"

Main Deck	
Main Beam	16" T-1 Steel
Centers	41" Standard
Side Rails	16" T-1 Steel
Crossmembers	10"
Spacing	12"
Outriggers	Full Height Removable
# Of Outriggers	18 Per Side
# Of D-Rings	14 Per Side
Front Ramps	Steel 18" x 31" Std.
Rear Deck	
Riser	35° Rear Bridge Ramp
Rear Deck Beam	16.5" T-1 Steel
Rear Well Style	Boom & Bucket Well
# of D-Rings	2 Per Side
Set up for hydraulic powered flip	
Decking/Flooring	
Main Decking	1.75" (Apatong Full Width)
Wheel Covers	Steel Covered D-Plate
Well Decking	Removable V-Style - Full Length
Electrical	
Lights	LED Plus 2 - Rear Strobes
Connector	7 Way Connector
Tires & Rims	
Tires	275/70R x 22.5 "H"
Rims	8.25 x 22.5 Hub Piloted Outer Aluminum

Axles, Suspension, & Running Gear	
# of Axles	4
Axle Spacing	60"
Axle Capacity	25,000 lbs
Axle Track	77 1/2"
Brakes	16 1/2" x 7" - 25K
ABS	4S2M
Axle 1	Fixed Type 30/30 ABS
Axle 2	Fixed Type 30/30 ABS
Axle 3	Lift Type 30 Non-ABS
Axle 4	Hydraulic Flip Type 30 Non-ABS
Cush Air Ride Suspension - 25K	
Auto Dump	
Hydraulics	
Wet Line Kit - Wing Nut Connection	
11 HP Honda - Gas	
Gooseneck	
King Pin Style	Removable
King Pin Setting	16"
Swing Clearance	98"
5th Wheel Height	50"
King Pin	2"
Ride Height	4-Position
Finish	
Sandblast & Powder Coat	
Mud Flaps & Reflective Tape	
Flag Holders	
Dealer:	

Oficina Comercial: Badajoz 100 Of. 1117 - ☎ +56 (2) 32026730 - 📠 +56 (9) 78465444

